

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

(19)



Europaisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 751 627 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
02.01.1997 Bulletin 1997/01

(51) Int Cl.<sup>6</sup>: **H04B 1/38**(21) Application number: **96304618.0**(22) Date of filing: **21.06.1996**

(84) Designated Contracting States:  
**DE FR GB**

(72) Inventor: **Ajiro, Atsushi, c/o Sony Corp.**  
**Tokyo (JP)**

(30) Priority: **30.06.1995 JP 188461/95**


(74) Representative: **Ayers, Martyn Lewis Stanley**  
**J.A. KEMP & CO.**  
**14 South Square**  
**Gray's Inn**  
**London WC1R 5LX (GB)**

(71) Applicant: **SONY CORPORATION**  
**Tokyo (JP)**

(54) **Communication terminal equipment for receiving and sending message information and the control method thereof**

(57) A communication terminal equipment and the control method thereof, which display the message information read out from information storing means on display means, and perform a desired processing with respect to the displayed message information by simple inputting. The message information stored in storing

means is read out to display it on display means, and a plurality of setting items showing the corresponding processing with respect to the displayed message information are displayed on the display means. Then one of setting items is selected from a plurality of setting items by inputting means to execute the corresponding processing by control means.

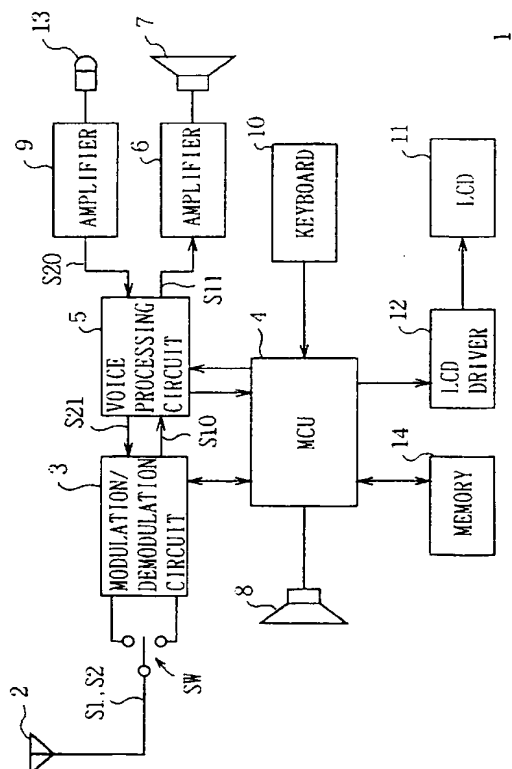**FIG. 1****EP 0 751 627 A2**

## D description

This invention relates to a communication terminal equipment and communication method, more particularly, and is applicable to use in a portable telephone equipment.

Nowadays, a portable telephone system is put to practical use in all the countries of the world. A communication terminal equipment is rapidly improved to have multi-functions in order to realize various services by using the system.

By the way, as an electronic mail in which a short sentence (hereinafter referred to as a short message) can be sent and received has spread by the development of computers, the same function is demanded in a portable terminal equipment.

However, in a conventional portable terminal equipment, when a message of sentence is sent and received, there has been a problem that few types of input key or a small picture of LCD (Liquid Crystal Display) for displaying letters cause the difficulty in inputting a sentence. Moreover, when a message is returned to reply to the reception, there has been a problem that a response can not be expressed exactly because of few usable display information.

In view of the foregoing, an object of this invention is to provide a communication terminal equipment and a communication method in which, a message can be made easily.

The foregoing object and other objects of the invention have been achieved by the provision of a communication terminal equipment having receiving and sending functions of message information, comprises: storing means for storing message information; display means for displaying message information and plural setting items which show correspondence processing on the message information; input means for inputting message information and selecting plural setting items which show correspondence processing on the message information; and control means for reading said message information from said storing means to display said message information on said display means, and then for displaying plural setting items which show correspondence processing on said message information to execute the correspondence processing on said displayed message information on the basis of a setting item selected by said input means.

Further, a control method of the communication terminal equipment having receiving and sending functions of message information, wherein: message information is stored; the stored message information is read out and displayed; plural setting items which show correspondence processing on said displayed message information are displayed; a setting item is selected among said plural setting items; and correspondence processing on said message information displayed corresponding to the selected setting item is executed.

The message information read out from the infor-

mation storing means is displayed on the display means, and with respect to the message information displayed by the simple input operation, a desired processing can be executed.

The nature, principle and utility of the invention will become more apparent from the following detailed description, given by way of example only, with reference to the accompanying drawings in which:

Figs. 1 is a schematic diagram showing the whole constitution of a communication terminal equipment according the embodiment; and

Fig. 2 to 5 are schematic diagrams explaining the procedure of sending a short message.

In Fig. 1, 1 shows a portable telephone equipment as a whole. A RF signal S1 is received by an antenna 2 and is demodulated at a modulation/demodulation circuit 3 by controlling from a MCU 4 to be output to a voice processing circuit 5 as a baseband signal S10. The voice processing circuit 5 decodes the digital baseband signal S10 demodulated in accordance with the control of the MCU 4 and outputs the received data to the MCU 4. At the same time, the analog audio signal S11 which is a speaking data is supplied to an amplifier 6. The analog audio signal S11 is amplified at the amplifier 6, thereafter, converted by a speaker 7 into audible voice. Further, the MCU 4 operates a ringer 8 at this time in response to the reception to inform the reception to a user. Further, the received reception data is stored temporarily in a buffer memory (not shown) to use in the processing by the communication additional function.

While, in sending, the telephone number is first inputted by keys from a keyboard 10 referring to the display picture of LCD 11. The LCD 11 displays the telephone number inputted by keys on the screen through a LCD driver 12 which is controlled by the MCU 4. When the communication circuit is connected, voice is gathered by a microphone 13, and converted into analog audio signal to be amplified at an amplifier 9. The analog audio signal S20 output from the amplifier 9 is converted into the digital audio signal at the voice processing circuit 5, and corded to be output to the modulation/demodulation circuit 3. The modulation/demodulation circuit 3 modulates a baseband signal S21 generated from the digital audio signal into a RF signal S2 and a switch SW is switched to a sending side to transmit the signal by the antenna 2.

Here, the reception and sending of a short message is set in the portable telephone equipment 1. The short message is made by inputting keys using the keyboard 10 on the picture of the LCD 11 and is sent by a specified communication additional function. The short message is also made by reading out the sentence pattern of the letter information which has been previously stored in a memory 14 being information storing means to edit it on the picture of the LCD 11. The letter information is formed by symbols which contains letters, numerals,

lines, etc. Moreover, the reply to the reception of the short message can be set by selecting a reply processing such as the reply which sends out the short message to reply, the CC (Carbon Copy) which refers the message sent before and makes the short message to reply, and the automatically telephone to the telephone number of sender.

In the above construction, the procedure of a short message will be described referring to flow charts shown in Figs. 2 to 5.

In Fig. 2, the selection items which are "Read" (read a message), "MakeSend" (make and send a message), and "Delete" are displayed on the screen S1 which is a first screen of the procedure. A cursor is matched with one of these items and clicked. Here, when "Read" is selected, the telephone number of the sender is displayed on the screen S2. When a cursor is matched with the telephone number of the sender whose message is desired to be read on the screen S2 and clicked to select, the content of the desired message is displayed on the screen S3.

After the message has been read, the selection items which are "store" (store the short message sent), "delete" (delete the message), "AutoTel" (telephone automatically), and "reply" are displayed on the next screen S4, and one of these items is selected. Here, when a cursor is matched with "store" and clicked, a processing proceeds to the processing of storing the message. If it succeeds to store, "Stored! this MSG To SelfADD area!" showing the success of storing is displayed on the screen S5, thereafter, a screen returns to the screen S2.

Further, when "delete" to delete a message is selected on the screen S4, a screen changes to the screen S6 first and confirms again if the used message is deleted. When a cursor is matched with "Yes" here and clicked to select, "Delete!" showing the execution of deletion is displayed on the next screen S7. After the deletion, a screen returns to the screen S2. Also, if the deletion is cancelled here, a screen returns to the screen S4 as it is.

Further, on the screen S4, a cursor is matched with "AutoTel" and clicked to select, a screen changes to the screen for connecting a call of the screen S8, and calls to speak to the sender whose message has been read now. At this time, when finishing speaking, a screen changes to the screen S9 to select either of "Store" to store the received short message or "Delete". Here, when a cursor is matched with "Store" and clicked to select, a screen changes to the screen S10 where "Stored!" showing the execution of storing is displayed on the screen S10, thereafter, a screen returns to the screen S1 (Fig. 2). While, when a cursor is matched with "Delete" here and clicked to select, a screen changes to the screen S11. The deletion of the short message is confirmed here again, and then "Delete!" showing the execution of the deletion is displayed on the screen S12, thereafter, returns to the screen S1. Also, when the de-

letion is cancelled on the screen S11 for confirmation, a screen returns to the screen S4 as it is.

Further, when "Delete" to delete a received message is selected on the screen S1, a screen changes to the screen S13 to display the telephone number of sender. When the telephone number of a sender whose message is desired to delete is selected on the screen S13, a screen changes to the screen S14 where the content of the message sent is displayed. After the content of the message received is confirmed on the screen S14, a screen changes to the screen S15 where it is displayed if the used message is deleted to confirm again. When a cursor is matched with "Yes" and clicked to select, the deletion is executed and then "Delete!" is displayed on the screen S16. After the deletion, a screen returns to the screen S1. Also, when "No" is selected to cancel the deletion, a screen returns to the screen S1 as it is.

Thus, in the portable telephone equipment 1, the received message is read out, and the processing such as storing and deletion of the received message, automatically telephoning to the sender, or reply can be executed by simple operation which only specifies the selection item of each function displayed on the picture of LDC 11 and clicks by a cursor.

Further, when "MakeSend" signifying that a message is made and sent is selected on the screen S1, a screen changes to the screen S20 (Fig. 4) for setting the making short message. In the similar way, when "reply" is selected on the screen S4, a screen changes to the screen S20 for setting the making short message.

Next, the procedure of sending a short message shown in Fig. 4 will be explained. The procedure of sending a short message first selects the method for making a short message on the screen S20. More specifically, the selection items are set on the screen S20, which are "NEW" signifying that a sentence is made by inputting keys newly; "UsePtttn" signifying that a sentence is made by using a previously prepared sentence pattern; "SelfADD" signifying that a sentence is made by referring the message of sentence which has been sent before; and "Received" signifying that a sentence is made by referring the received message for reply. Here, when a cursor is matched with "NEW" signifying that a sentence is made by inputting keys newly and clicked to select, a screen changes to the screen S21 where a sentence of message can be made by inputting keys from a key board 10. The screen S21 scrolls up as shown in the screen S22 when an input line becomes full of words.

After the sentence of short message has been inputted, a screen changes to the screen S23 to select whether the made short message is sent or not. When the sending is selected, a screen changes to the screen S24, and a cursor is matched with any of the methods of inputting telephone number to be telephoned and clicked to select. That is, methods for selecting telephone number to be telephoned are: "TelDir" which is a

method of obtaining data from a telephone number book stored in a predetermined information storing means memory 14; "Redial" which is a method of re-dialling the telephone number stored in a buffer memory (not shown); and "Normal" which is a method of inputting a telephone number normally. When the reply function described above is used here, the telephone number received last is displayed on the screen S25 as a telephone number to be telephoned.

Then, "Running!" is displayed on the screen S26 shown in Fig. 5 during the transmission. When the transmission succeeds, a screen changes to the screen S27 where the success of transmission is displayed by "SC received!" informing that the service center (SC) receives. After that, either of "Store" signifying that the presently used message is stored or "Delete" is selected. When a cursor is matched with "Store" and clicked to select, a screen changes to the screen S29 where "Stored!" signifying that it is during the execution of storing is displayed and then returns to the screen S1. Also, when "Delete" is selected, a screen changes to the screen S30 where it is confirmed again whether the deletion is executed or not, thereafter, changes to the screen S31 where "Delete!" signifying that it is during the deletion is displayed, and then returns to the screen S1. Further, when the deletion is cancelled on the screen S30, a screen returns to the screen S1 as it is.

Also, in the case where the telephone number to be telephoned is input on the screen S25 (Fig. 4) and then the service center fails to receive it during the transmission, "SC not received! Try Again!" is displayed on the screen S32 (Fig. 5) and returns to the screen S23 (Fig. 4). On the screen S23, the content of the short message to be sent is confirmed again, and the operation of inputting telephone number is retried.

Further, on the screen S20, when a cursor is matched with "UsePtt" and clicked to select, a screen changes to the screen S33 where a sentence message which has been previously stored in the memory 14 is read out to display a sentence used to make a short message on the LCD 11 as a sentence pattern. A cursor is matched with a desired sentence pattern from the sentence patterns displayed on the scroll picture of the screen S33 and clicked to select. Moreover, when a cursor is matched with "SelfADD" and clicked to select, a screen changes to the screen S34 where a sentence of message sent before is selected based on the telephone number of sender. That is, sentence patterns corresponding to the telephone number has been previously stored in the memory 14, and the desired sentence pattern can be read out in accordance with the telephone number.

Also, when "Received" is selected, a screen changes to the screen S35 where the received message is used to a message to be sent. Then, a screen changes from the screen S33, S34, or S35 to the screen S22 where a message is corrected or added to edit a sentence on a keyboard 10. Thereafter, the process after

the screen S22 is executed in accordance with the same process as the described case where a sentence is made by inputting from keys newly (the screen S22 to the screen S35), and a short message is sent out.

The sentence of a short message to be sent out is made by the edition such as correction or addition on the basis of the sentence patterns which have been previously stored in the memory 14 or the sentence of the short message which has been received before. Therefore, a troublesome operation of inputting characters in making a sentence can be widely reduced.

According to the above constitution, in the portable telephone equipment 1, in a case where a short message is sent and received, the selection items displayed on the screen is specified with a cursor and clicked on the LCD 11 in accordance with the setting procedure, to select easily.

Further, according to the embodiment described above, the sentence pattern which has been previously made and stored in the memory 14 or the message which has been received before is used to correct or add the short message to be sent out, so that a troublesome operation of making a sentence can be widely reduced.

Note that the embodiments discussed above have dealt with the case where a portable telephone equipment is used as a communication terminal equipment. However, the present invention is not limited to this but other general communication terminal equipments such as a wired communication equipment can be widely used as a communication terminal equipment.

Further, note that the embodiments discussed above have dealt with the case where the short message is sent and received as message information. However, the present invention is not limited to this but a voice message being the voice information can be sent and received as message information.

According to the present invention described above, the message information read out from information storing means is displayed on display means and is edited by input means, so that a communication terminal equipment and the communication method can be realized, in which the message information can be made by simple inputting.

While there has been described in connection with the preferred embodiments of the invention, it will be obvious to those skilled in the art that various changes and modifications may be aimed, therefore, to cover in the appended claims all such changes and modifications as fall within the true spirit and scope of the invention.

## Claims

1. A communication terminal equipment having receiving and/or sending functions of message information, comprising:

- storing means for storing message information;  
display means for displaying message information and plural setting items which show correspondence processing on the message information;  
input means for inputting message information and selecting plural setting items which show correspondence processing on the message information; and  
control means for reading said message information from said storing means to display said message information on said display means, and then for displaying plural setting items which show correspondence processing on said message information to execute the correspondence processing on said displayed message information on the basis of a setting item selected by said input means.
2. The communication terminal equipment according to claim 1, wherein said control means is for displaying the setting items for a store of said message information, a deletion of said message information, a call to sender who has sent said message information, and a response by message information to a sender who has sent said message information, as plural setting items which show correspondence processing on said message information.
  3. The communication terminal equipment according to claim 2, wherein said control means, in the case where the setting item for a call to the sender who has sent said message information is selected among plural setting items which show correspondence processing on said message information by said input means, after finishing speaking, displays the setting items for a store of said message information and for a deletion of said message information on said display means.
  4. The communication terminal equipment according to claim 2 or 3, wherein said control means, in the case where the setting item for a response by message information to the sender who has sent said message information is selected among plural setting items which show correspondence processing on said message information by said input means, displays the setting items for a newly making of message information, a use of previously prepared message information, and a reference of previously sent message information on said display means in order to make a response message.
  5. The communication terminal equipment according to claim 4, wherein said control means is for making said response message and sending it, and then displaying the setting items for a store of said re-
- sponse message information and a deletion of said message information on said display means.
6. A control method for a communication terminal equipment having receiving and/or sending functions of message information, wherein:
    - message information is stored;
    - the stored message information is read out and displayed;
    - plural setting items which show correspondence processing on said displayed message information are displayed;
    - a setting item is selected among said plural setting items; and
    - correspondence processing on said message information displayed corresponding to the selected setting item is executed.
  7. The control method according to claim 6, wherein the setting items for a store of said message information, a deletion of said message information, a call to the sender who has sent said message information, and a response by message information to the sender who has sent said message information are displayed, as plural setting items which show correspondence processing on said message information.
  8. The control method according to claim 7, wherein in the case where the setting item for a call to a sender who has sent said message information is selected among plural setting items which show correspondence processing on said message information by said input means, after finishing speaking, the setting items for a store of said message information and for a deletion of said message information are displayed.
  9. The control method according to claim 7 or 8, wherein in the case where the setting item for a response by message information to the sender who has sent message information is selected among plural setting items which show correspondence processing on said message information, the setting items for a newly making of message information, a use of previous prepared message information, and a reference of previously sent message information and received message information are displayed.
  10. The control method according to claim 9, wherein said response message is made and sent, and then the setting items for a store of said response message information and for a deletion of said message information are displayed.

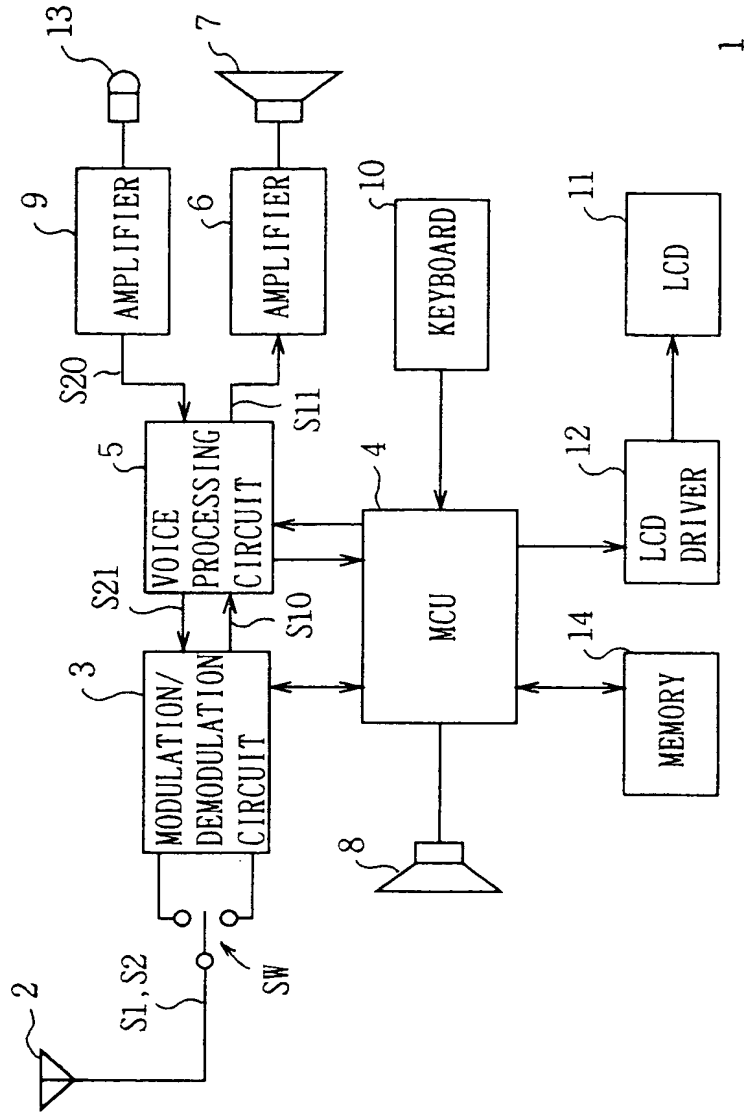


FIG. 1



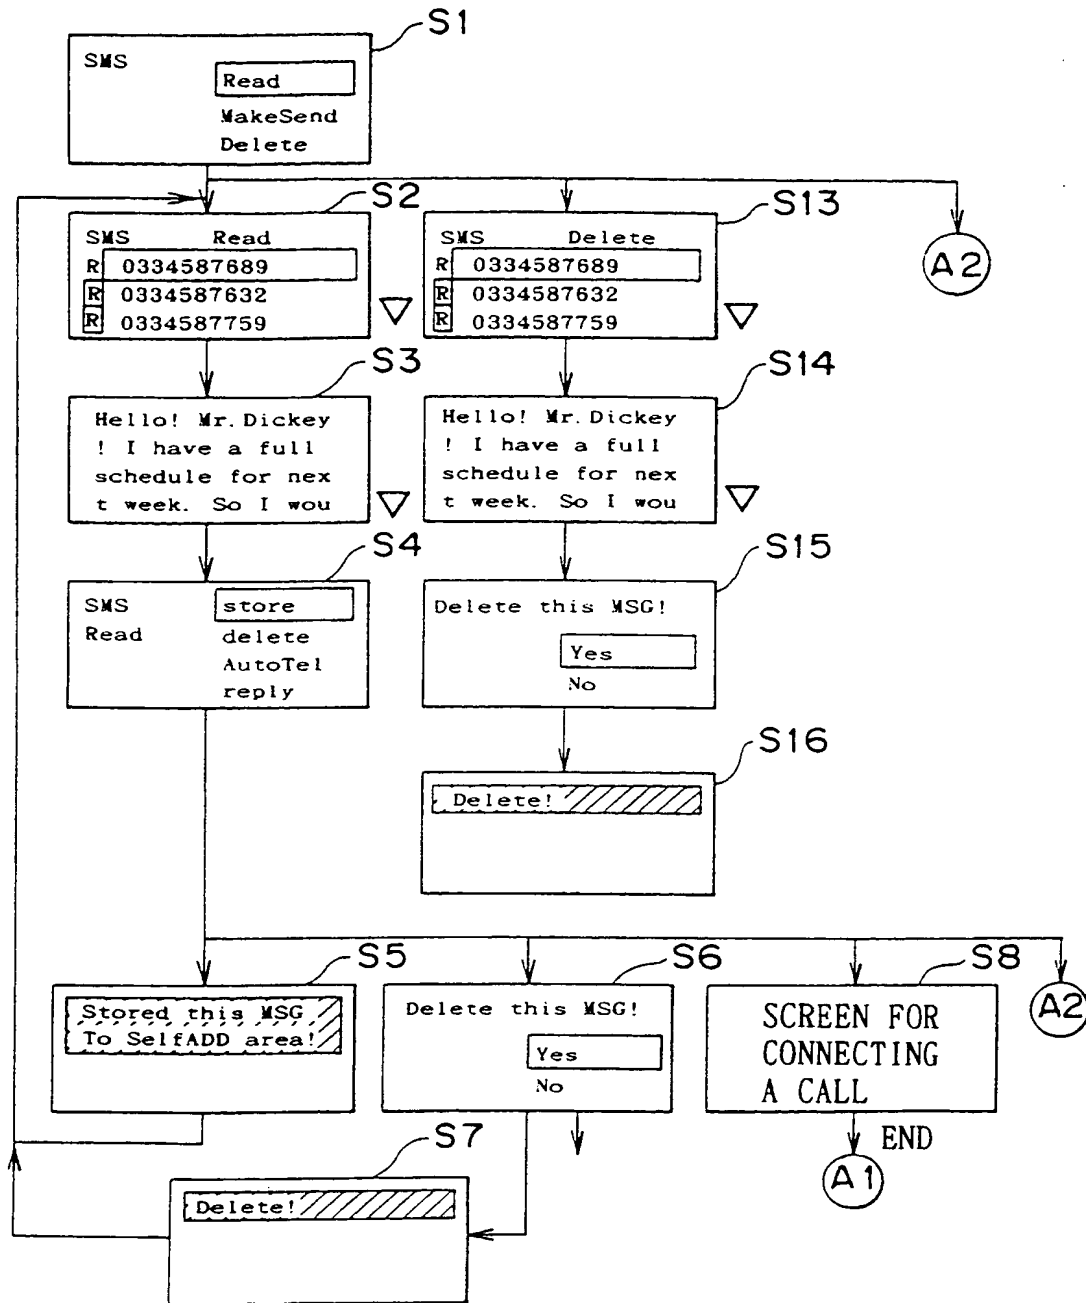


FIG. 2

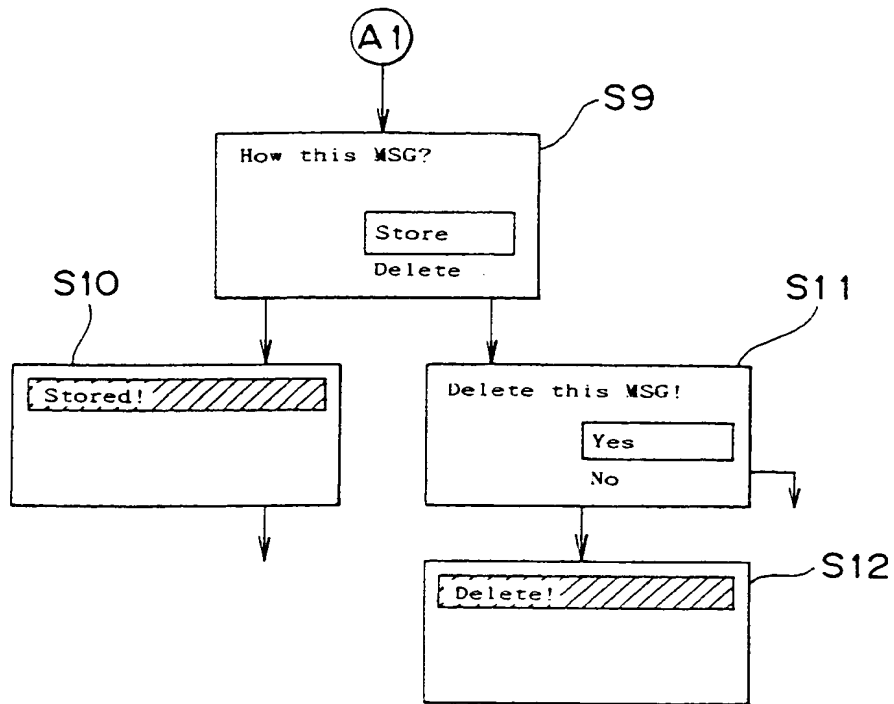


FIG. 3

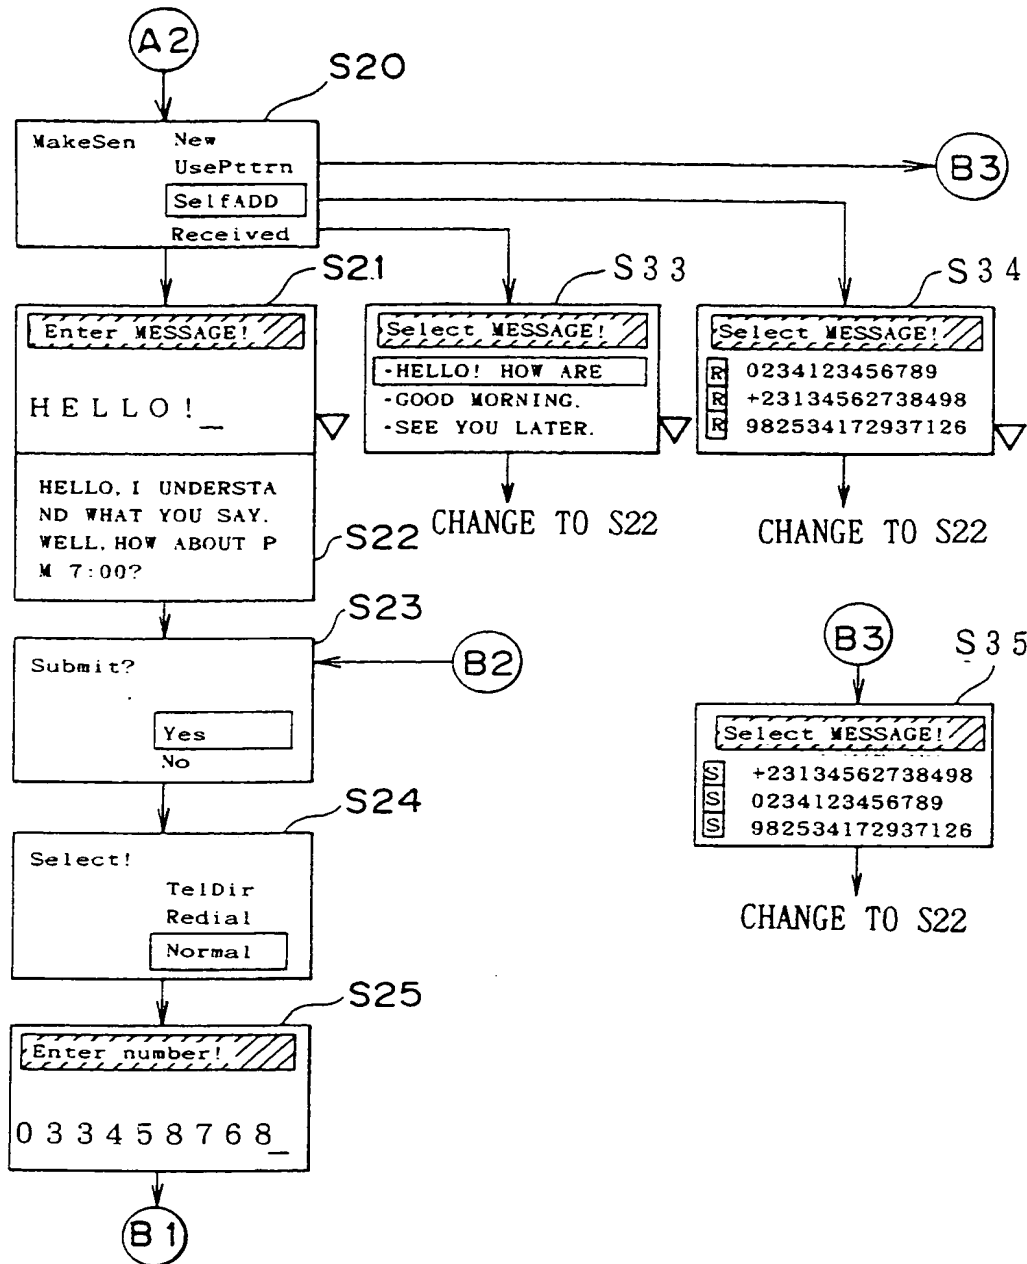


FIG. 4


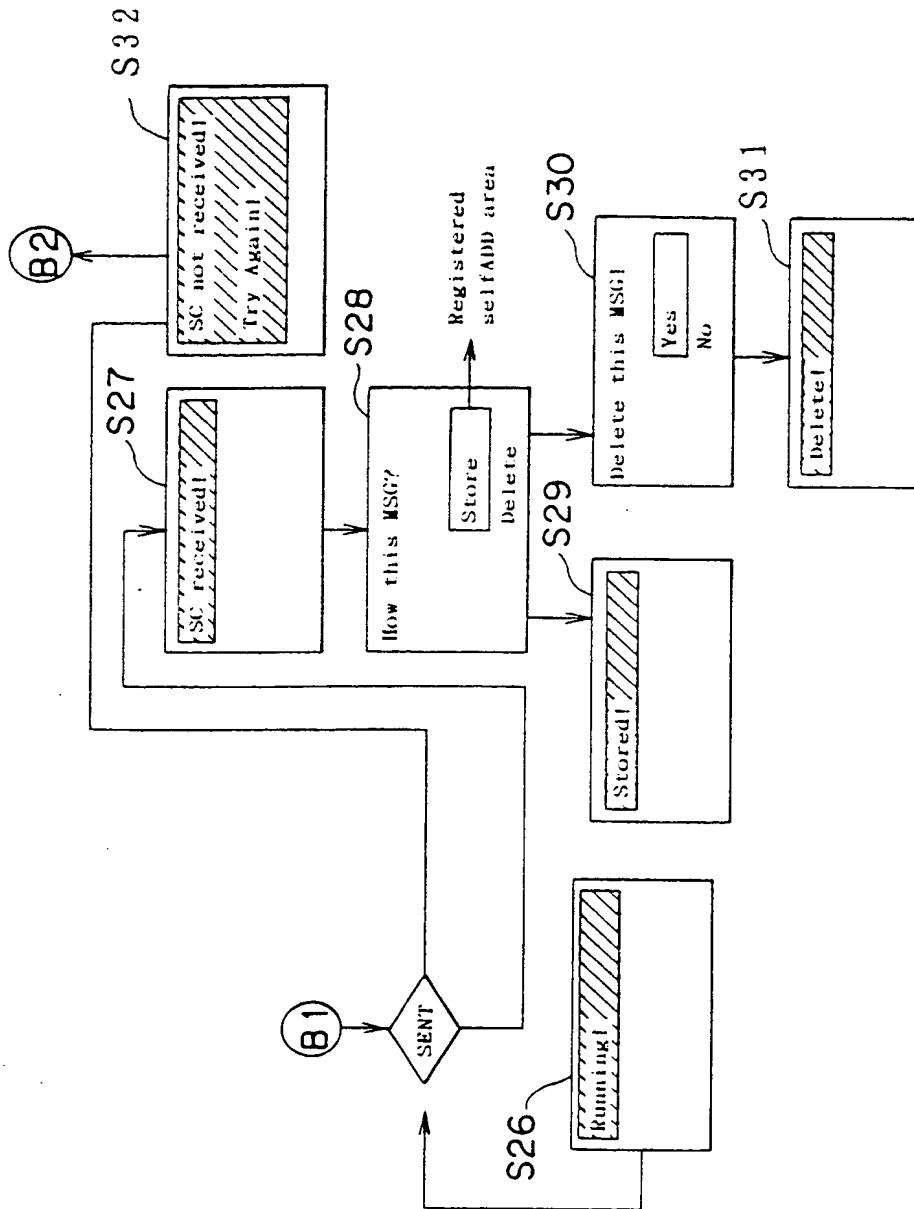


FIG. 5



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 751 627 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
14.04.1999 Bulletin 1999/15

(51) Int Cl.<sup>6</sup>: H04B 1/38, H04Q 7/32,  
H04M 1/72

(43) Date of publication A2:  
02.01.1997 Bulletin 1997/01

(21) Application number: 96304618.0

(22) Date of filing: 21.06.1996

(84) Designated Contracting States:  
DE FR GB

(72) Inventor: **Ajiro, Atsushi**, c/o Sony Corp.  
Tokyo (JP)

(30) Priority: 30.06.1995 JP 188461/95

(74) Representative: **Ayers, Martyn Lewis Stanley**  
J.A. KEMP & CO.  
14 South Square  
Gray's Inn  
London WC1R 5LX (GB)

(71) Applicant: **SONY CORPORATION**  
Tokyo (JP)

(54) **Communication terminal equipment for receiving and sending message information and the control method thereof**

(57) A communication terminal equipment and the control method thereof, which display the message information read out from information storing means on display means, and perform a desired processing with respect to the displayed message information by simple inputting. The message information stored in storing

means is read out to display it on display means, and a plurality of setting items showing the corresponding processing with respect to the displayed message information are displayed on the display means. Then one of setting items is selected from a plurality of setting items by inputting means to execute the corresponding processing by control means.

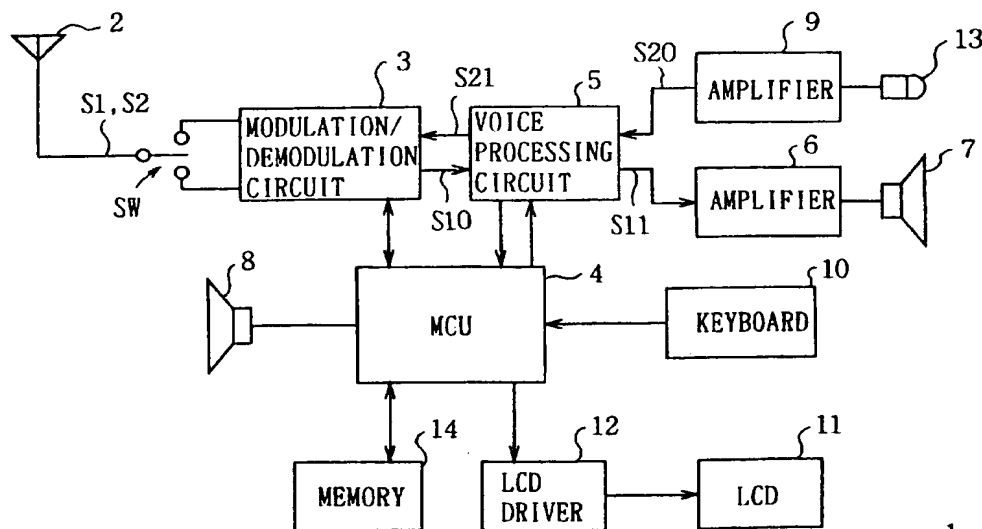


FIG. 1



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 4618

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	WO 94 30023 A (CELLTRACE COMMUNICATIONS LTD ;MICHAELS WAYNE DAVID (GB); TIMSON AN) 22 December 1994 * page 8, line 17 - line 37; figure 5 *	1-4,6-9	H04B1/38 H04Q7/32 H04M1/72
A	DE 42 33 066 A (SIEMENS AG) 7 April 1994 * the whole document *	1-4,6-9	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04Q H04M
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>15 February 1999</b>	Examiner: <b>Andersen, J.G.</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 92 (P04001)